


平面和键槽的剖面尺寸 (GB/T1095-1979)

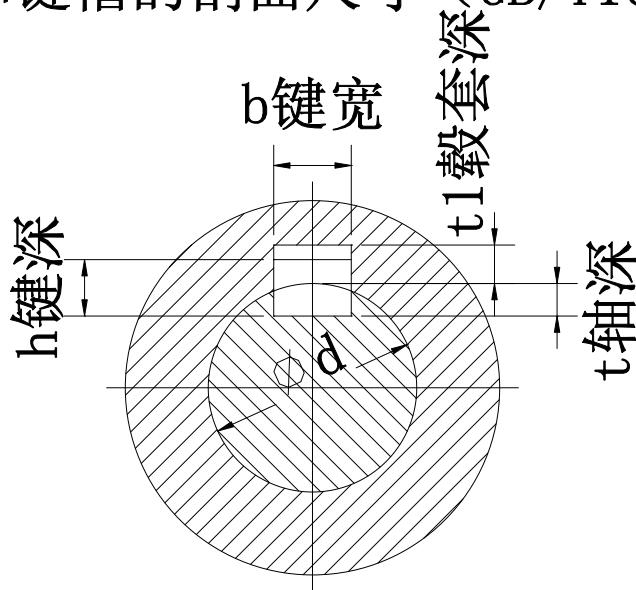

轴 径	键	键 槽											
d	b*h	b	宽 度 b					深 度				半径 r	
			偏 差					轴		毂套			
			较松		一般		较紧						
			轴H9	毂套D10	轴N9	毂套JS9	轴和毂套P9	t	极限偏差	t1	极限偏差	最小	最大
6~8	2*2	2	+0.025 0	+0.060 +0.020	-0.004 -0.029	±0.0125	-0.006 -0.031	1.2	+0.1 0	1	+0.1 0	0.08	0.16
>8~10	3*3	3					1.8	1.4					
>10~12	4*4	4					2.5	1.8					
>12~17	5*5	5	+0.030 0	+0.078 +0.030	0 -0.030	±0.015	-0.012 -0.042	3.0		2.3		0.16	0.25
>17~22	6*6	6					3.5	2.8					
>22~30	8*7	8	+0.036 0	+0.098 +0.040	0 -0.036	±0.018	-0.015 -0.051	4.0	+0.2 0	3.3	+0.2 0	0.25	0.40
>30~38	10*8	10					5.0	3.3					
>38~44	12*8	12					5.0	3.3					
>44~50	14*9	14	+0.043 0	+0.120 +0.050	0 -0.043	±0.0215	-0.018 -0.061	5.5		3.8			
>50~58	16*10	16					6.0	4.3					
>58~65	18*11	18					7.0	4.4					
>65~75	20*12	20					7.5	4.9					
>75~85	22*14	22	+0.052 0	+0.149 +0.065	0 -0.052	±0.026	-0.022 -0.074	9.0		5.4		0.40	0.60
>85~95	25*14	25					9.0	5.4					
>95~110	28*16	28					10.0	6.4					
>110~130	32*18	32					11.0	7.4					
>130~150	36*20	36					12.0	+0.3 0	8.4	+0.3 0	0.70	1.0	
>150~170	40*22	40	+0.062 0	+0.180 +0.080	0 -0.062	±0.031	-0.026 -0.088		13.0				9.4
>170~200	45*25	45					15.0		10.4				
>200~230	50*28	50					17.0		11.4				
>230~260	56*32	56					20.0		12.4				
>260~290	63*32	63	+0.074 0	+0.220 +0.100	0 -0.074	±0.037	-0.032 -0.106	20.0	+0.3 0	12.4	+0.3 0	1.2	1.6
>290~330	70*36	70					22.0	14.4					
>330~380	80*40	80					25.0	15.4					
>380~440	90*45	90	+0.087 0	+0.260 +0.120	0 -0.087	±0.0435	-0.037 -0.124	28.0		17.4		2.0	2.5
>440~500	100*50	100					31.0	19.5					