

Steel ball valves for general-purpose industrial applications

出售大量阀门技术图纸，工艺，计算，设计资料，代理非标阀门设计，标书制作QQ1263719818

ICS 23.060.20

National foreword

This British Standard was published by BSI. It is the UK implementation of ISO 7121:2006. It supersedes BS 5159:1974 which is withdrawn.

The UK participation in its preparation was entrusted by Technical Committee PSE/7, Industrial valves, to Subcommittee PSE/7/5, Ball and plug valves.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

出售大量阀门技术图纸，工艺，计算，设计资料，代理非标阀门设计，标书制作QQ1263719818

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 May 2007

© BSI 2007

ISBN 978 0 580 50699 4

Amendments issued since publication

Amd. No.	Date	Comments

INTERNATIONAL STANDARD

ISO 7121

Second edition
2006-05-15

Steel ball valves for general-purpose industrial applications

*Robinets en acier à tournant sphérique pour les applications
industrielles générales*

出售大量阀门技术图纸，工艺，计算，设计资料，代理非标阀门设计，标书制作QQ1263719818



Reference number
ISO 7121:2006(E)

出售大量阀门技术图纸，工艺，计算，设计资料，代理非标阀门设计，标书制作QQ1263719818

Contents

Page

Foreword.....	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Pressure/temperature ratings.....	3
4.1 Valve rating.....	3
4.2 Shell rating	3
4.3 Seat and seal rating	3
5 Design	4
5.1 Flow passageway.....	4
5.2 Body	5
6 Materials	13
6.1 Shell	13
6.2 Shell material repair	13
6.3 Trim	14
6.4 Identification plate	14
6.5 Bolting.....	14
6.6 Seals.....	14
6.7 Threaded plugs	14
7 Marking	14
7.1 Legibility	14
7.2 Body marking	14
7.3 Ring joint marking	15
7.4 Identification plate	15
7.5 Special marking for unidirectional valves.....	15
8 Testing and inspection.....	15
8.1 Pressure tests	15
8.2 Inspection	17
8.3 Examination.....	18
8.4 Supplementary examination.....	18
9 Preparation for despatch	18
Annex A (informative) Information to be specified by purchaser	19
Annex B (informative) Identification of valve parts	20
Bibliography	23

出售大量阀门技术图纸，工艺，计算，设计资料，代理非标阀门设计，标书制作QQ1263719818

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 7121 was prepared by Technical Committee ISO/TC 153, *Valves*, Subcommittee SC 1, *Design, manufacture, marking and testing*.

This second edition cancels and replaces the first edition (ISO 7121:1986), which has been technically revised.

出售大量阀门技术图纸，工艺，计算，设计资料，代理非标阀门设计，标书制作QQ1263719818

Introduction

The purpose of this International Standard is the establishment, in ISO format, of basic requirements and practices for flanged, butt-welding, socket welding and threaded-end steel ball valves having flow passageways identified as full bore, reduced bore and double reduced bore, suitable for general purpose applications. Flanged end Class designated valves have flanges in accordance with ASME B16.5. Flanged end PN designated valves have flanges in accordance with EN 1092-1. Valves with ends that are threaded can have threads to either ISO 7-1 or ASME B1.20.1.

出售大量阀门技术图纸，工艺，计算，设计资料，代理非标阀门设计，标书制作QQ1263719818

出售大量阀门技术图纸，工艺，计算，设计资料，代理非标阀门设计，标书制作QQ1263719818

Steel ball valves for general-purpose industrial applications

1 Scope

This International Standard specifies the requirements for a series of steel ball valves suitable for general-purpose industrial applications.

It covers valves of the nominal sizes (see ISO 6708 and ASME B16.34)

- DN 8, 10, 15, 20, 25, 32, 40, 50, 65, 80, 100, 150, 200, 250, 300, 350, 400, 450, 500 (NPS 1/4, 3/8, 1/2, 3/4, 1, 1 1/4, 1 1/2, 2, 2 1/2, 3, 4, 6, 8, 10, 12, 14, 16, 18 and 20),

and is applicable to the following pressure designations (see ISO 7268 or EN 1333, and ASME B16.34):

- Class 150; 300; 600; 900 and PN 10; 16; 25; 40; 63; 100.

It includes provisions for valve characteristics as follows ¹⁾:

- flanged and butt-welded ends in sizes $15 \leq DN \leq 500$ ($1/2 \leq NPS \leq 20$);

出售大量阀门技术图纸、工艺、计算、设计资料、代理非标阀门设计，标书制作QQ1263719818

- socket welding ends in sizes $8 \leq DN \leq 100$ ($1/4 \leq NPS \leq 4$);

- threaded ends in sizes $8 \leq DN \leq 50$ ($1/4 \leq NPS \leq 2$);

- body seat openings designated as full bore, reduced bore, and double reduced bore;

- materials;

- testing and inspection.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 7-1, *Pipe threads where pressure-tight joints are made on the threads — Part 1: Dimensions, tolerances and designation*

ISO 7-2, *Pipe threads where pressure-tight joints are made on the threads — Part 2: Verification by means of limit gauges*

ISO 228-1, *Pipe threads where pressure-tight joints are not made on the threads — Part 1: Dimensions, tolerances and designation*

1) Valve characteristics are not necessarily available in all nominal sizes for all pressure designations, e.g. Class 900 applies only for reduced bore body seat openings.

ISO 228-2, *Pipe threads where pressure-tight joints are not made on the threads — Part 2: Verification by means of limit gauges*

ISO 261, *ISO general purpose metric screw threads — General plan*

ISO 965-2:1998, *ISO general purpose metric screw threads — Tolerances — Part 2: Limits of sizes for general purpose external and internal screw threads — Medium quality*

ISO 4032, *Hexagon nuts, style 1 — Product grades A and B*

ISO 4033, *Hexagon nuts, style 2 — Product grades A and B*

ISO 4034, *Hexagon nuts — Product grade C*

ISO 5208, *Industrial valves — Pressure testing of valves*

ISO 5209, *General purpose industrial valves — Marking*

ISO 5752:1982, *Metal valves for use in flanged pipe systems — Face-to-face and centre-to-face dimensions*

ISO 10497, *Testing of valves — Fire type-testing requirements*

EN 1092-1, *Flanges and their joints — Circular flanges for pipes, valves, fittings and accessories, PN designated — Part 1: Steel flanges*

EN 12982, *Industrial valves — End-to-end and centre-to-end dimensions for butt welding end valves*

EN 1515-1:1999, *Flanges and their joints — Bolting — Part 1: Selection of bolting*

ASME B1.1, *Unified Inch Screw Threads UN and UNR Thread Form*

ASME B1.20.1, *Pipe Threads, General Purpose (Inch)*

ASME B16.5, *Pipe Flanges and Flanged Fittings*

ASME B16.10, *Face to Face and End to End Dimensions of Valves*

ASME B16.34:2004, *Valves Flanged, Threaded and Welding End*

ASME B18.2.2, *Square and Hex Nuts*

MSS-SP-55, *Quality Standard for Steel Castings for Valves, Flanges and Fittings and Other Piping Components — Visual Method for Evaluation of Surface Irregularities*²⁾

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

service pressure/temperature rating

lesser of the shell or seat pressure/temperature rating

2) Manufacturers Standardization Society standard.

3.2**anti-static design**

design that provides for electrical continuity between the body, ball and stem of the valve

3.3**anti-blow-out design**

design that ensures the valve stem cannot be ejected from the body in the event of the gland being removed while the valve is under pressure

4 Pressure/temperature ratings**4.1 Valve rating**

The service pressure/temperature rating applicable to valves specified in this International Standard shall be the lesser of the shell rating, 4.2 or the seat rating, 4.3.

4.2 Shell rating

4.2.1 The pressure/temperature ratings applicable to the valve pressure containing shell (the pressure boundary elements, e.g. body, body cap, trunnion cap, cover, body inserts) shall be in accordance with that specified in the pressure/temperature tables of either ASME B16.34, Standard Class, for Class designated valves, or EN 1092-1 for PN designated valves.

4.2.2 The temperature for a corresponding shell pressure rating is the maximum temperature that is permitted for the pressure-containing shell of the valve. In general, this maximum temperature is that of the contained fluid. The use of a pressure rating corresponding to a temperature other than that of the contained fluid is the responsibility of the user. For temperatures below the lowest temperature listed in the pressure/temperature tables (see 4.2.1), the service pressure shall be no greater than the pressure for the lowest listed temperature. Consideration should be given to the loss of ductility and impact strength of many materials at low temperature.

4.3 Seat and seal rating

4.3.1 Non-metallic elements, e.g. seat, seals or stem seals can impose restrictions on the applied pressure/temperature rating. Any such restriction shall be shown on the valve identification plate in accordance with 7.4.

4.3.2 The design shall be such that, when either polytetrafluoroethylene (PTFE) or reinforced PTFE is used for seats, the minimum valve pressure/temperature rating shall be as specified in Table 1. Designs using these seating materials having pressure/temperature ratings less than those shown in Table 1 are not in compliance with this International Standard.

4.3.3 Seat ratings for other seat materials shall be the manufacturer's standard. However, the assigned valve service pressure/temperature rating shall not exceed that of the valve shell.

出售大量阀门技术图纸、工艺、计算、设计资料、代理非标阀门设计、标书制作001263719818

Table 1 — Minimum seat pressure/temperature rating

Temperature ^b °C	PTFE seats ^a bar ^c				Reinforced PTFE seats ^a bar ^c			
	Floating ball			Trunnion	Floating ball			Trunnion
	DN ≤ 50	50 < DN ≤ 100	DN > 100	DN > 50	DN ≤ 50	50 < DN ≤ 100	DN > 100	DN > 50
	NPS ≤ 2	2 < NPS ≤ 4	NPS > 4	NPS > 2	NPS ≤ 2	2 < NPS ≤ 4	NPS > 4	NPS > 2
–29 to 38	69,0	51,0	19,7	51,0	75,9	51,0	19,7	51,0
50	63,6	47,1	18,2	47,1	70,4	47,8	18,4	47,8
75	53,3	39,2	15,2	39,2	59,9	40,4	15,6	40,4
100	43,0	31,3	12,1	31,3	49,4	33,1	12,8	33,1
125	32,7	23,3	9,1	23,3	38,9	25,8	10,0	25,8
150	22,4	15,4	6,1	15,4	28,3	18,4	7,2	18,4
175	12,1	7,5	3,0	7,5	17,8	11,1	4,4	11,1
200	—	—	—	—	7,3	3,7	1,6	3,7
205	—	—	—	—	5,2	2,3	1,0	2,3

For a given PN or Class designation, the assigned valve pressure/temperature ratings shall not exceed the shell ratings, see 4.2.

^a Polytetrafluoroethylene seats.

^b Consult manufacturer for maximum design temperature rating of the valve seats.

^c 1 bar = 0,1 MPa = 10⁵ Pa = 1 N/mm².

出售大量阀门技术图纸, 工艺, 计算, 设计资料, 代理非标阀门设计, 标书制作QQ1263719818

5 Design

5.1 Flow passageway

The flow passageway includes the circular seat opening in the ball (the port) and the body runs leading thereto. The body runs are the intervening elements that link the seat opening to the end connection, e.g. to the thread end, weld end or socket end, or to the end-flange. Collectively, the flow passageway through the ball port and body runs is referred to as the flow passageway. The ball port is categorized in this International Standard as full-bore, reduced-bore, and double reduced-bore. The minimum effective diameter for each category shall be such that a hypothetical cylinder, having a diameter according to Table 2, can be passed through.

Table 2 — Cylindrical diameter for categorizing bore size

Nominal size DN	Minimum bore diameter mm					Nominal size NPS
	Full bore			Reduced bore	Double reduced bore	
	PN 10, 16, 25 and 40	PN 63	PN 100	PN: all	PN: all	
	Class 150 and 300	—	Class 600	Class: all	Class: all	
8	6	6	6	6	N/A	1/4
10	9	9	9	6	N/A	3/8
15	11	11	11	8	N/A	1/2
20	17	17	17	11	N/A	3/4
25	23	23	23	17	14	1
32	30	30	30	23	18	1 1/4
40	37	37	37	27	23	1 1/2
50	49	49	49	36	30	2
65	62	62	62	49	41	2 1/2
80	74	74	74	55	49	3
100	98	98	98	74	62	4
150	148	148	148	98	74	6
200	198	196	194	144	100	8
250	245	245	241	186	141	10
300	295	293	291	227	202	12
350	325	322	318	266	230	14
400	375	371	365	305	250	16
450	430	423	421	335	305	18
500	475	467	453	375	335	20
N/A Valves having this configuration are not within the scope of this International Standard.						
For Class 900, only valves having reduced port are within the scope of this International Standard.						

出售大量阀门技术图纸，工艺，计算，设计资料，代理非标阀门设计，标书制作QQ1263719018

5.2 Body

5.2.1 Body wall thickness

5.2.1.1 The minimum valve body wall thickness, t_m , shall be as specified in Table 3, except that for butt-welding end valves the welding ends for connection to pipe shall be in accordance with the requirements of Figure 1.

5.2.1.2 The minimum thickness requirements are applicable to, and are measured from, internally wetted surfaces, i.e. up to the point where body seals are effective.

Table 3 — Valve body wall thickness


PN	10 and 16			25 and 40			63			100			—	PN
Class	150			300			—			600			900 ^a	Class
Nom. size DN	Minimum valve body wall thickness, <i>t_m</i> mm													Nom. size NPS
	Full bore	Reduced bore	Double reduced bore	Full bore	Reduced bore	Double reduced bore	Full bore	Reduced bore	Double reduced bore	Full bore	Reduced bore	Double reduced bore	Reduced bore	
8	2,7	2,7	N/A	2,9	2,9	N/A	2,7	2,7	N/A	3,1	3,1	N/A	3,4	1/4
10	2,9	2,9	N/A	3,0	2,9	N/A	2,9	2,9	N/A	3,4	3,3	N/A	3,8	3/8
15	3,1	3,1	N/A	3,2	3,2	N/A	3,1	3,1	N/A	3,6	3,6	N/A	4,1	1/2
20	3,4	3,4	N/A	3,7	3,7	N/A	3,5	3,5	N/A	4,1	4,1	N/A	5,8	3/4
25	3,9	3,8	3,8	4,1	4,1	4,1	4,0	4,0	4,0	4,7	4,6	4,6	6,0	1
32	4,3	4,2	4,2	4,7	4,6	4,6	4,4	4,3	4,3	5,1	5,0	5,0	6,4	1 1/4
40	4,7	4,5	4,5	5,2	5,0	5,0	4,8	4,7	4,7	5,5	5,4	5,4	5,8	1 1/2
50	5,5	5,3	5,3	6,2	5,9	5,9	5,6	5,5	5,5	6,3	6,0	6,0	7,0	2
65	5,7	5,6	5,6	6,7	6,5	6,5	6,5	6,3	6,3	6,7	6,4	6,4	7,9	2 1/2
80	6	5,9	5,9	7,1	6,9	6,9	7,2	7,0	7,0	7,6	7,2	7,2	9,4	3
100	6,3	6,3	6,3	7,6	7,6	7,6	8,2	7,9	7,9	9,2	8,7	8,7	11,8	4
150	7,1	6,9	6,9	9,3	8,9	8,9	10,1	9,8	9,8	12,6	11,8	11,8	16,3	6
200	7,9	7,7	7,7	10,9	10,4	10,4	12,5	12,0	12,0	15,7	14,7	14,7	20,5	8
250	8,7	8,4	8,4	12,55	12,0	12,0	14,5	13,5	13,5	18,9	17,6	17,6	24,9	10
300	9,5	9,2	9,2	14,2	13,5	13,5	16,5	15,5	15,5	22,3	20,7	20,7	29,1	12
350	10	9,6	9,6	15,2	14,4	14,4	17,8	16,8	16,8	24,1	22,5	22,5	31,8	14
400	10,8	10,4	10,4	16,8	16	16	19,8	18,6	18,6	27,3	25,4	25,4	36,0	16
450	11,7	11,1	11,1	18,7	17,3	17,3	21,7	20,4	20,4	31,1	28,9	28,9	42,0	18
500	12,4	11,9	11,9	20,2	18,8	18,8	24,0	22,5	22,5	33,2	30,8	30,8	44,3	20
N/A Valves having this configuration are not within the scope of this International Standard.														
^a For Class 900, only valves having reduced ball ports are within the scope of this International Standard.														

5.2.1.3 Local areas having less than minimum wall thickness are acceptable, provided that all of the following conditions are satisfied:

- the area of sub-minimum thickness can be enclosed by a circle, the diameter of which is not greater than $0,35 \sqrt{dt_m}$, where d is the minimum bore diameter given in Table 2 and t_m is the minimum wall thickness given in Table 3;
- the measured thickness is not less than $0,75 t_m$;
- enclosed circles are separated from each other by an edge to edge distance of not less than $1,75 \sqrt{dt_m}$.


5.2.1.4 The manufacturer, taking into account such factors as component bolting or thread assembly loads, rigidity needed for component alignment, other valve design details and the specified operating conditions, is responsible for determining if a larger wall thickness is required.

Dimensions and tolerances in millimetres

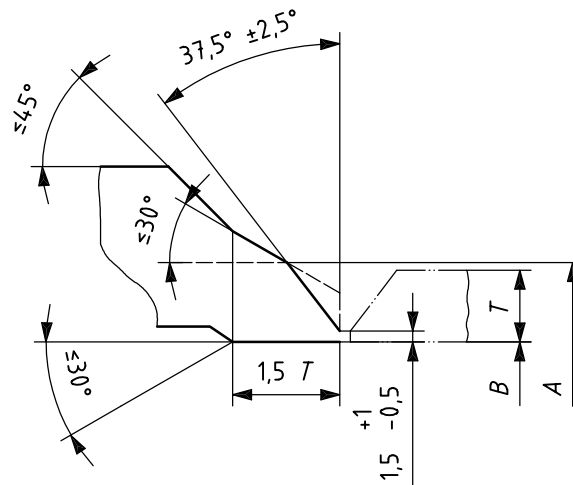

a) Welding end for connection to pipe of wall thickness $T \leq 22$ mm

出售大量阀门技术图纸，工艺，计算，设计资料，代理非标阀门设计，标书制作QQ1263719818

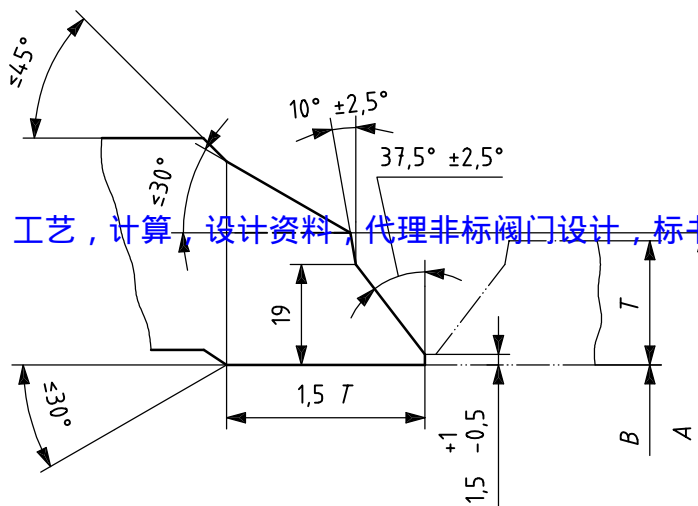

b) Welding end for connection to pipe of wall thickness $T > 22$ mm

Key

- A nominal outside diameter of welding end (see Table 4)
- B nominal inside diameter of pipe (see Table 4 for applicable tolerance)
- T nominal wall thickness of pipe

The inside and outside surfaces of valve welding ends are machine finished overall. The contour outside the envelope formed by the end of the welding end and the dimension $1,5 T$ is at the option of the manufacturer, unless specifically ordered otherwise.

Intersections should be slightly rounded.

Valves with minimum wall thickness equal to 3 mm or less may have ends cut square or slightly chamfered.

For nominal outside diameters and wall thickness of standard steel pipe, see ISO 4200 or ASME B36.10.

Figure 1 — Welding ends

Table 4 — Welding ends

Nominal size, DN		15	20	25	32	40	50	65	80	100	150	200	250	300	350	400	450	500
Nominal size, NPS		1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	6	8	10	12	14	16	18	20
A, mm	diameter	22	28	35	44	50	62	78	91	117	172	223	278	329	362	413	464	516
	tolerance	+2,5 -1,0										+4 -1						
B, mm	tolerance	+1 -1										+2 -2						+3 -2

5.2.2 Flanged ends

5.2.2.1 Body end flanges shall comply with the requirements of ASME B16.5 for Class designated valves and EN 1092-1 for PN designated valves. Raised face end flanges shall be provided, unless otherwise specified by the purchaser.

5.2.2.2 Face-to-face dimensions for flanged-end valves shall be in accordance with ASME B16.10 for Class designated valves or ISO 5752:1982, Basic Series 1, 14, and 27, for PN designated valves, with an applicable tolerance for $DN \leq 250$ of ± 2 mm and for $DN \geq 300$ of ± 4 mm.

5.2.2.3 End flanges shall be either cast or forged integral with the body or end piece of a split body design, or attached by welding by a qualified welder using an accepted welding procedure, with the condition that all such flanges on valves larger than DN 50 shall be butt-welded. Any heat treatment necessary to ensure that the material is suitable for the full range of service temperature shall be performed.

5.2.2.4 End flange facing finish shall be in accordance with ASME B16.5 for Class designated valves or EN 1092-1 for PN designated valves unless otherwise specified by the purchaser.

5.2.3 Butt-welding ends

5.2.3.1 Butt-welding ends shall be in accordance with Figure 1 and Table 4, unless otherwise specified by the purchaser.

5.2.3.2 End-to-end dimensions for Class designated valves shall be in accordance with ASME B16.10 for either the long or short pattern, or in accordance with EN 12982 for PN designated valves.

5.2.4 Socket welding ends

5.2.4.1 The socket bore axis shall coincide with the end entry axis. Socket end faces shall be perpendicular to the socket bore axis. The socket bore diameter and its depth shall be as specified in Table 5.

5.2.4.2 The minimum socket wall thickness, extending over the full socket depth shall be as specified in Table 6.

5.2.4.3 End to end dimensions for socket welding end valves shall be established by the manufacturer.

Table 5 — Socket diameter and depth

DN	Diameter ^a	Depth ^b	NPS
	mm		
8	14,1	9,5	1/4
10	17,5	9,5	3/8
15	21,7	10	1/2
20	27,0	13	3/4
25	33,8	13	1
32	42,5	13	1 1/4
40	48,6	13	1 1/2
50	61,1	16	2
65	73,8	16	2 1/2
80	89,7	16	3
100	115,1	19	4
^a The applicable diametral tolerance is — $\begin{smallmatrix} +0,5 \\ 0 \end{smallmatrix}$ for DN ≤ 50, and — $\begin{smallmatrix} +0,7 \\ 0 \end{smallmatrix}$ for DN > 50.			
^b The depth dimension is a minimum value.			

出售大量阀门技术图纸，工艺，计算，设计资料，代理非标阀门设计，标书制作QQ1263719818

5.2.5 Threaded ends

5.2.5.1 The threaded end thread axis shall coincide with the end entry axis. The minimum wall thickness at the threaded end shall be as specified in Table 6. An approximate 45° lead-in chamfer, having an approximate depth of one-half the thread pitch, shall be applied at each threaded end.

5.2.5.2 The end threads shall be either taper or parallel pipe threads meeting the applicable requirements of ISO 7-1, ISO 228-1 or ASME B1.20.1, with threads gauged in accordance with ISO 7-2, ISO 228-2 or ASME B1.20.1, as applicable. The required pipe thread shall be specified in the purchase order.

5.2.5.3 End-to-end dimensions for threaded end valves shall be established by the manufacturer.

5.2.6 Body openings

Trunnion mounted valves that employ upstream sealing seats shall be fitted with a test plug, DN 15 (NPS 1/2) or smaller, having threads in accordance with 5.2.5.2 in order to complete the closure tightness test. Other tapped openings, for any purpose, are permitted only when specified by the purchaser.

5.2.7 Anti-static design

When specified in the purchase order, valves shall incorporate an antistatic feature that ensures electrical continuity between stem and body of valves DN \leq 50 and between ball, stem and body of larger valves. The antistatic feature shall have electrical continuity across the discharge path with a resistance not exceeding 10 Ω from a power source not exceeding 12 V d.c. when type tested on a new, dry, as-built valve after pressure testing and cycling of the valve at least five times.

Table 6 — Socket and threaded end wall thickness

PN	10, 16, 25 and 40	63 and 100	—	PN
Class	150 and 300	600	900	Class
DN	Minimum wall thickness mm			NPS
8	3,0	3,3	4,1	1/4
10	3,0	3,6	4,3	3/8
15	3,3	4,1	5,3	1/2
20	3,6	4,3	6,1	3/4
25	3,8	5,1	6,9	1
32	3,8	5,3	7,1	1 1/4
40	4,1	5,6	7,9	1 1/2
50	4,6	6,1	9,7	2
65	5,6	7,6	10,4	2 1/2
80	6,4	8,6	12,2	3
100	7,5	10,1	14,3	4

5.2.8 Anti-blow-out stem

The valve design shall be such that the stem seal retaining device is not the sole means used to retain the stem. The design shall ensure that, while under pressure, the stem is not ejected from the valve by the disassembly of valve external parts, e.g. gland and gland flange bolting. See Annex B.

5.2.9 Ball-stem construction

5.2.9.1 The valve design shall be such that if a failure occurs either between the stem-to-ball connection or any part of the stem within the pressure boundary, no portion of the stem is ejected when the valve is under pressure.

5.2.9.2 Both the stem-to-ball connection and all of that part of the stem within the pressure boundary shall be designed to exceed the torsional strength of the stem external to the packing.

5.2.9.3 The stem and the connection between the stem and the ball shall be designed to preclude permanent deformation or failure of any part when a force applied to the direct operating lever or the operational means of a manual gear operator, whichever is furnished with the valve, transmits a torque to the valve stem equal to twice the manufacturer's maximum recommended torque.

5.2.9.4 The manufacturer's recommended torque shall be based on clean and non-lubricated liquids with a viscosity not higher than water at a differential pressure equal to the maximum differential service pressure.

5.2.10 Ball construction

The ball shall have a circular bore (flow passageway).

5.2.11 Operating means

5.2.11.1 Valves that are solely manually operated, i.e. without an attached gear or power-assist device, shall be fitted with lever-type handles unless otherwise specified by the purchaser.

5.2.11.2 Gear operators, when specified or required to meet the operating force requirements of 5.2.11.3, shall be provided with handwheels for actuation.

5.2.11.3 Unless otherwise specified by the purchaser, the length of the lever-type handle or the diameter of the manual gear handwheel shall be sized so that the applied input force needed to open or close the valve does not exceed 350 N at the manufacturer's recommended operating torque.

5.2.11.4 For lever-operated valves, position stops shall be provided at both the full open and full closed positions.

5.2.11.5 Valves shall be designed to close whenever the lever or handwheel is turned in a clockwise direction.

5.2.11.6 Handwheels on manual gear operators shall be marked to indicate either the direction of opening or closing.

5.2.11.7 Lever-type handles shall be mounted with the handle parallel to the ball bore. If the purchaser specifies round or oval direct operating handwheels, a permanent means of indicating the open and closed positions shall be provided.

5.2.11.8 Lever or manual gear box handwheel design shall be such that the lever- or gearbox-indicating means does not assemble in other than the correct configuration for indicating the open and closed positions.

5.2.11.9 An indication of the position of the flow passageway through the ball shall be integral with the valve stem. This indication may be by a permanent marking on the stem or by a shaping of the stem.

5.2.11.10 Levers, handwheels and other operating mechanisms shall be fitted to the valve such that they can be removed and replaced without affecting the integrity of the stem or body seal or retention of the stem.

5.2.12 Glands

5.2.12.1 Adjustable packing glands shall be accessible for tightening stem seals without the disassembly of either the valve or operator parts.

5.2.12.2 Packing glands that are threaded into bodies or covers (see Annex B) shall not be used for valve sizes DN > 200 (NPS > 8).

5.2.12.3 Vertically split glands shall not be used except by agreement with the purchaser.


5.2.12.4 Position stops integral with the gland or gland flange shall not be used.

5.2.13 End flange facing interruptions

5.2.13.1 Ring-shaped radial gaps, located in what would be the seating face area of a centred spiral wound style gasket on the end-flange facing area of end flanges, shall not exceed 1,5 mm. The gap is shown as dimension *b* in Figure 2. An example of the occurrence of this type of gap is one that can exist between the outer periphery of a body insert and the inner bore of the body end flange of the valve. This is shown in Figure 2.

5.2.13.2 For ball valves designed with a body insert (see Annex B), with a gasket seating face outer diameter located within the seating area of a centred spiral wound gasket, the body insert flange face shall not protrude beyond the valve body end flange face. The flange face on the body insert shall not be recessed below the body end flange face by more than 0,25 mm. The recess is shown as dimension *a* in Figure 2.

5.2.13.3 Threads for body inserts (see Figure 2) shall have a thread shear area such that the resultant thread shear stress is ≤ 70 MPa at an internal pressure equal to the 38 °C pressure rating.

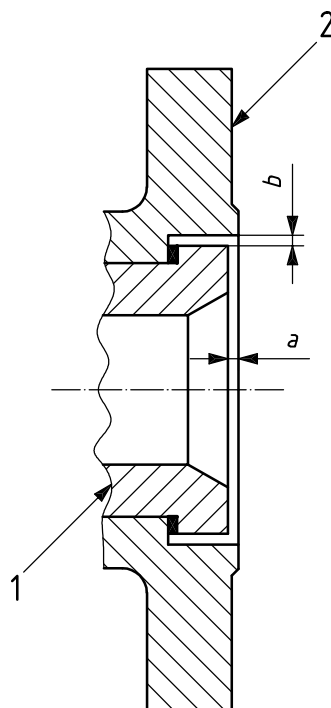**Key**

- 1 body insert
- 2 valve body end flange

Figure 2 — Flange face interruption limits

出售大量阀门技术图纸，工艺，计算，设计资料，代理非标阀门设计，标书制作QQ1263719818

5.2.14 Shell joints

5.2.14.1 Shell joints are characterized as bolted body-to-cap joints, threaded body-to-cap joints, bolted cover joints and threaded cover joints. Body-to-cap joints are those that can be subject to piping mechanical loads, whereas cover joints are not. See Annex B for a nomenclature of the parts.

5.2.14.2 Bolting used for assembly of shell joints shall be studs or continuously threaded stud bolts with nuts or cap screws. Nuts shall be semi-finished hexagons conforming to ASME B18.2.2, ISO 4032, ISO 4033 or ISO 4034. ASME-specified bolting of 25 mm diameter and smaller shall have coarse (UNC) threads. ASME-specified bolting larger than 25 mm diameter shall be 8 thread series (8UN). ASME-specified bolt threads shall be Class 2A and nut threads shall be Class 2B, conforming to ASME B1.1. Metric-specified bolting M30 and smaller shall have coarse threads. Metric-specified bolting larger than M30 shall be fine threads with 3 mm pitch. Metric-specified threads shall be in accordance with ISO 261 and ISO 965-2:1998, tolerance class 6g.

5.2.14.3 Nut and bolt head bearing surfaces in shell joints assembled by bolting shall be perpendicular to the centerline of the tapped or clearance hole for the fastener with a tolerance of $\pm 1^\circ$.

5.2.14.4 A bolted body-to-body cap joint (see Annex B for nomenclature) shall be secured by a minimum of four bolts. The minimum bolt size shall be as follows:

- M10 or 3/8 for sizes $25 \leq DN \leq 65$;
- M12 or 1/2 for sizes $80 \leq DN \leq 200$;
- M16 or 5/8 for sizes $250 \leq DN$.

5.2.14.5 A bolted or threaded shell joint shall, as minimum, meet one of the following applicable requirements:

— bolted body-to-cap	$P_c \frac{A_g}{A_b} \leq 50,76 S_b \leq 7\,000$
— threaded body-to-cap	$P_c \frac{A_g}{A_s} \leq 3\,300$
— bolted cover	$P_c \frac{A_g}{A_b} \leq 65,26 S_b \leq 9\,000$
— threaded cover	$P_c \frac{A_g}{A_s} \leq 4\,200$

where

S_b is the allowable bolt stress at 38 °C, expressed in megapascals, except when greater than 138 MPa, in which case use 138 MPa;

P_c is, for Class designated valves, the Class designation number, e.g. 600, or, for PN designated valves, the PN designation number multiplied by 6, e.g. for PN 40, use $40 \times 6 = 240$;

A_g is the area bounded by the effective outside periphery of the gasket, expressed in square millimetres (mm²);

A_b is the total effective bolt tensile stress area, expressed in square millimetres (mm²);

A_s is the total effective thread shear stress area, expressed in square millimetres (mm²).

5.2.14.6 At assembly, gasket contact surfaces shall be free of heavy oils, grease and sealing compounds. A light coating of a lubricant, no heavier than kerosene, may be applied if needed to assist in proper gasket assembly.

5.2.15 Packing gland bolting

5.2.15.1 When a packing gland is included, the packing gland bolting shall pass through holes in the gland. Open slots for bolting are not permitted in the cover flange, cover or gland.

5.2.15.2 Packing gland bolts shall be sized so that the bolt tensile stress does not exceed one-quarter of the ultimate tensile strength of the bolting material for a compressive packing stress of 38 MPa.

6 Materials

6.1 Shell

The shell, which comprises, as applicable, the body, body insert, body cap, cover and trunnion cap, shall be of a material specified in ASME B16.34 for Class designated valves or EN 1092-1 for PN designated valves. These shell parts are identified in Annex B.

6.2 Shell material repair

Defects in cast or forged valve pressure shell materials that are revealed during manufacturing operations or testing may be repaired as permitted by the most nearly applicable material specification for forgings or castings.

6.3 Trim

The internal metal parts of the valve, such as the ball, stem, metal seats or seat retainers, shall be corrosion resistant and have corrosion-resistant properties equivalent to or better than those of the shell. The purchaser may specify materials having greater corrosion resistance or higher strength for these parts.

6.4 Identification plate

Identification plates shall be of corrosion-resistant material and shall be attached by corrosion-resistant fastenings or by welding.

6.5 Bolting

Unless otherwise specified by the purchaser, bolting materials for assembling shell pressure-retaining components shall be in accordance with ASME B16.34:2004, Table 1, Group 4, or EN 1515-1:1999, Table 2.

6.6 Seals

Material for stem seals, body seals, cover seals and gaskets shall be suitable for use at the maximum allowable temperature and its corresponding pressure rating applied to the valve by the manufacturer. Metallic parts used in seals shall have corrosion-resistant properties equivalent to or better than those of the shell material.

6.7 Threaded plugs

Threaded plugs used for sealing tapped openings shall have corrosion-resistant properties equivalent to or better than those of the shell. Malleable, grey or any other form of cast iron shall not be used for plugs.

[出售大量阀门技术图纸，工艺，计算，设计资料，代理非标阀门设计，标书制作QQ1263719818](#)

7 Marking

7.1 Legibility

Each valve manufactured in accordance with this International Standard shall be clearly marked in accordance with ISO 5209, except that the following requirements shall apply.

7.2 Body marking

7.2.1 The mandatory valve body markings, subject to the provisions of 7.2.2, shall be as follows:

- manufacturer's name or trade mark;
- body material;
- pressure rating as PN followed by the appropriate pressure number, e.g. PN 16, for PN designated valves, or pressure Class number, e.g. 150, for Class designated valves;
- nominal size, as either DN followed by the appropriate size number, e.g. DN 500, or the NPS number, e.g. 20.

7.2.2 For valves smaller than DN 50, if the size or shape of the valve body precludes the inclusion of all the required markings, one or more may be omitted provided that they are shown on the identification plate. The sequence of omission shall be as follows:

- nominal size;
- PN designation or Class number;
- body material.

7.3 Ring joint marking

Body end flanges require marking only when the end flanges are grooved for a ring type end flange gasket. When so grooved, the ring joint gasket number (e.g. R25) shall be marked on the rim of both end flanges. For ring joint gasket numbers, see ASME B16.5.

7.4 Identification plate

Each valve shall have an identification plate with the following marking:

- the manufacturer's name or trademark;
- pressure rating designation, PN or Class;
- manufacturer's identification number;
- maximum pressure at 38 °C;
- limiting temperature and associated pressure, if applicable;
- limiting differential pressure and associated temperature, if applicable;
- trim identification, e.g. PTFE;
- pipe thread identification, e.g. NPT or RC.

The number of this International Standard may be included, provided that all of its applicable requirements have been met.

7.5 Special marking for unidirectional valves

Valves designed for, or modified to have, only a unidirectional capability, i.e. the ability to block flow in only one direction, shall have a separate identification plate attached to the valve body to identify the unidirectional seat. The unidirectional seat shall be shown on the identification plate as shown in Figure 3.

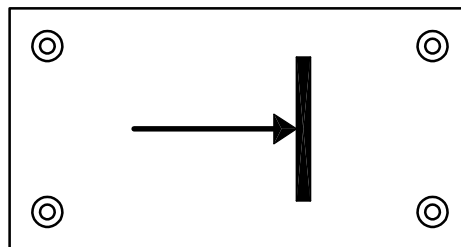


Figure 3 — Typical unidirectional valve identification plate symbol

8 Testing and inspection

8.1 Pressure tests

8.1.1 General

Each valve shall be given a shell pressure test, and a seat closure test in accordance with the requirements of ISO 5208 except as modified herein. Sealing compounds, greases or oils shall be removed from seating surfaces prior to pressure testing. It is, however, permissible for metal-to-metal seating surfaces, to apply a film of oil that is not heavier than kerosene to prevent metallic galling.

8.1.2 Shell test

8.1.2.1 The shell test shall be at a pressure not less than 1,5 times the pressure corresponding to the valve 38 °C pressure rating. If the valve design includes an adjustable stem seal, it shall be adjusted so as to maintain the shell test pressure.

8.1.2.2 The duration of the shell test — the minimum period of time that the shell test pressure is to be sustained — shall be in accordance with Table 7.

8.1.2.3 Over the duration of the shell test there shall be no visually detectable leakage through either the shell wall or any of the body seals.

Table 7 — Test duration

Valve size range	Minimum test duration s	
	Shell test	Seat test
DN ≤ 50	15	15
65 ≤ DN ≤ 200	60	60
250 ≤ DN ≤ 300	120	120
350 ≤ DN ≤ 500	300	120

8.1.3 Closure tightness test

8.1.3.1 For valve designs having resilient seats, the closure tightness test shall be a gas test with test gas at a pressure of between 4 bar and 7 bar (400 kPa and 700 kPa). For floating ball designs, the test method shall be one that fills the body cavity between the seats and the body ball chamber with test gas so as to ensure that no seat leakage can escape detection. For trunnion-mounted valves of upstream sealing design, the test method shall be one that measures leakage across the upstream seat. For trunnion-mounted valves of downstream sealing design, the test method shall be one that measures leakage across the downstream seat.

8.1.3.2 For valve designs having metal or ceramic seats, the closure tightness test shall be a liquid test with the test fluid at a pressure not less than 1,1 times the rated seat pressure at 38 °C (100 °F). For floating ball designs, the test method shall be one that fills the body cavity between the seats and the body ball chamber with test liquid, so as to ensure that no seat leakage can escape detection. For trunnion-mounted valves of upstream sealing design, the test method shall be one that measures leakage across the upstream seat. For trunnion-mounted valves of downstream sealing design, the test method shall be one that measures leakage across the downstream seat.

8.1.3.3 The applicable closure test of 8.1.3.1 or 8.1.3.2 shall be applied, one flow direction at a time, for each seating direction.

8.1.3.4 The duration of the closure test — the minimum period of time that the test pressure is to be sustained for the purpose of obtaining a closure leakage measurement — shall be in accordance with Table 7.

8.1.3.5 Over the duration of the closure test, the maximum permitted leakage rate past the seats shall be in accordance with Table 8.

Table 8 — Maximum allowable seat leakage

Valve size range	Maximum allowable seat leakage rate		
	Gas test	Liquid test	
	Resilient seats ^a	Metal or ceramic seats ^b	
	—	mm ³ /s	drops/s
DN ≤ 50	0	6,0	0,1
65 ≤ DN ≤ 150	0	12,5	0,2
200 ≤ DN ≤ 300	0	20,8	0,4
350 ≤ DN ≤ 500	0	29,2	0,5
^a Refer to 8.1.3.7 regarding zero leakage rate. ^b The manufacturer may choose either method of quantifying liquid leakage. It is recognized that the unit conversions are inexact.			

8.1.3.6 For resilient seats, visual evidence of leakage through the ball, behind the seats, or past shaft seals is not permitted. There shall be no structural damage as a result of the closure test. Plastic deformation of resilient seats or seals is not considered to be structural damage.

8.1.3.7 For the purposes of the gas closure test, zero leakage is defined as 3 mm³ (one bubble) over the duration of the test.

8.2 Inspection

出售大量阀门技术图纸，工艺，计算，设计资料，代理非标阀门设计，标书制作QQ1263719818

8.2.1 Extent of inspection

Inspection by the purchaser may be specified in the purchase order. If not otherwise specified, inspection shall be limited to the following:

- inspection of the valve assembly to ensure compliance with the specifications of the purchase order, which may include specified non-destructive methods of examination;
- witnessing the required pressure tests and examinations;
- review of mill test reports and, if specified, non-destructive examination records and radiographs.

8.2.2 Site inspection

8.2.2.1 When a purchaser specifies that the purchaser witness tests and examinations at the valve manufacturer's factory, the purchaser's inspector shall have free access to those parts of the factory concerned with the manufacture of the valves when work on the order is under way.

8.2.2.2 When a purchaser specifies examinations that include valve pressure boundary parts manufactured at locations other than the valve manufacturer's factory, these components shall be available for inspection at the location where they are being manufactured.

8.3 Examination

8.3.1 For each valve, the items listed in Annex A shall be checked by the manufacturer before release for shipment.

8.3.2 Castings of pressure boundary parts and the closure element (ball) shall be visually examined by the manufacturer during the course of manufacture so as to ensure that cast surfaces are in conformance with the surface condition requirements of MSS-SP-55.

8.3.3 The valve manufacturer shall examine each valve to assure compliance with this International Standard.

8.3.4 Examinations shall be performed in accordance with written procedures that are in accord with applicable standards.

8.4 Supplementary examination

8.4.1 Supplementary types of examination are required only if specified in the purchase order.

8.4.2 Magnetic particle, radiographic, liquid penetrant and ultrasonic examination of castings or forgings may be specified as either the purchaser's own procedures and acceptance standards, or those standardized in ASME B16.34:2004, Clause 8.

8.4.3 When service conditions require that a fire type-test be conducted, it is recommended that this test be in accordance with ISO 10497.

9 Preparation for despatch

出售大量阀门技术图纸，工艺，计算，设计资料，代理非标阀门设计，标书制作QQ1263719818

9.1 After testing, each valve shall be drained and prepared for despatch. Special care shall be taken to drain test fluid from the body chamber surrounding the ball.

9.2 Except for austenitic stainless steel valves, unmachined exterior valve body surfaces shall have a rust preventative coating in accordance with the manufacturer's standard. Such coatings shall not contain lead.

9.3 Except for austenitic stainless steel valves, machined or threaded surfaces that are not resistant to atmospheric corrosion shall be coated with an easily removed rust inhibitor. Such coatings shall not contain lead.

9.4 Protective covers of wood, wood fibre, plastic or metal shall be securely affixed to valve ends of flanged and butt-welding end valves in order to safeguard the gasket surfaces and weld end preparations. The cover design shall be such that the valve cannot be installed in a pipeline with the protective cover in place.

9.5 Protective end plugs of wood, wood fibre, plastic or metal shall be securely inserted into the valve ends of socket welding and threaded end valves. The protective plug design shall be such that the valve cannot be installed in a pipeline with the plug in place.

9.6 At the time of shipment, unless precluded by design, the ball shall be in the fully open position.

9.7 When special packaging is necessary, the purchaser shall specify the requirements in the purchase order.

Annex A (informative)

Information to be specified by purchaser

NOTE References between square brackets are to clauses or subclauses in this International Standard.

Nominal size [1] (DN or NPS)

Nominal pressure [1] (PN or Class)

Flow passageway [5.1] (full bore, reduced bore or double reduced bore)

Seat materials [4.3]

Body ends [5.2]

Threaded: (pipe threads ISO 7-1, ISO 228-1 or ASME B1.20.1) [5.2.5.2]

Flange facing: raised face, ring joint or other [5.2.2.1]

facing finish if other than standard [5.2.2.4]

Butt-welding end details if other than standard is needed [5.2.3.1]

Tapped openings required [5.2.6] 出售大量阀门技术图纸，工艺计算，设计资料，代理非标阀门设计，标书制作QQ1263719818

Anti-static feature [5.2.7]

Levers other than standard levers [5.2.11.1 and 5.2.11.7]

Gear actuators [5.2.11.2]

Acceptability of split packing glands [5.2.12.3]

Material [6]

Pressure containing shell [6.1]

Trim, material other than standard [6.3]

Bolting — special for low temperature [6.5]

Seals — temperature rated [6.6]

Purchaser site inspection, supplementary tests or examinations [8.2.2]

Supplementary non-destructive examinations [8.4]


Supplementary fire type-test [8.4.3]

Preparation for shipment [9.7]

Annex B (informative)

Identification of valve parts


The purpose of Figures B.1 and B.2 is only to identify part names. The construction of a valve is acceptable according to this International Standard only when it complies with it in all respects.

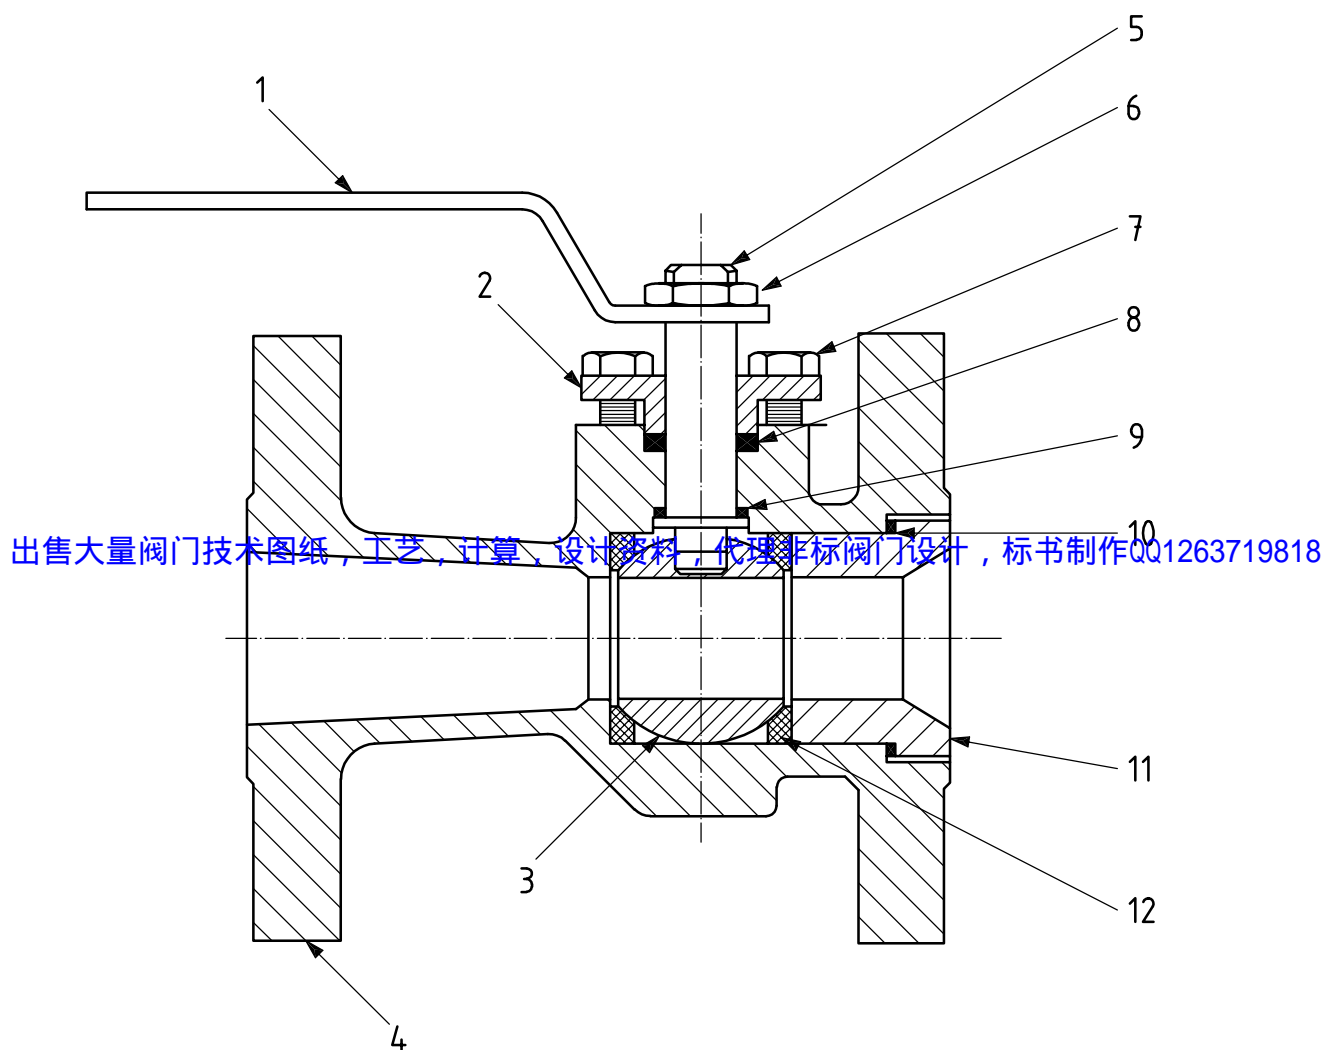

Key

- | | | | |
|---|---------------------|----|---------------|
| 1 | handle (lever type) | 7 | gland bolting |
| 2 | gland | 8 | stem seal |
| 3 | ball | 9 | thrust washer |
| 4 | body | 10 | body seal |
| 5 | stem | 11 | body insert |
| 6 | stem nut | 12 | seat |


Figure B.1 — Floating ball valve part names

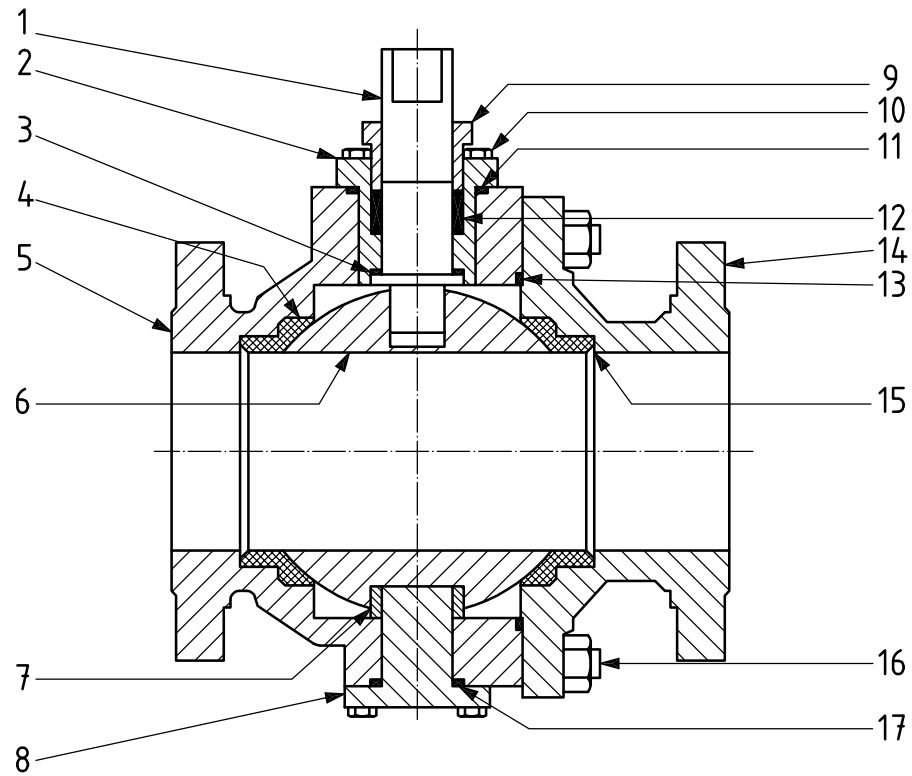

a) Example 1

出售大量阀门技术图纸，工艺，计算，设计资料，代理非标阀门设计，标书制作QQ1263719818

Figure B.2 — Trunnion-mounted ball valve part names

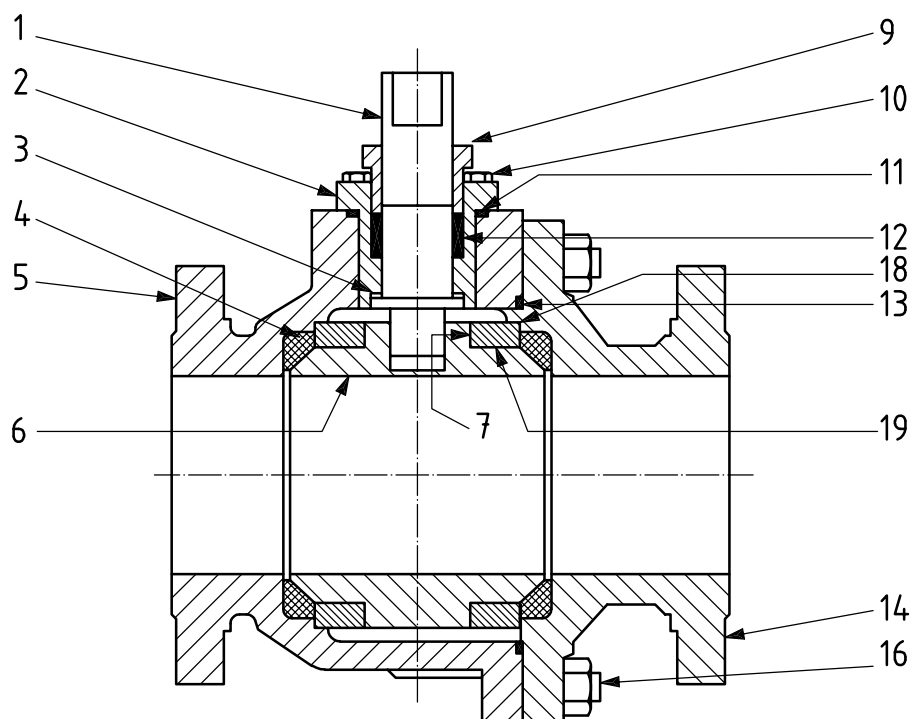

b) Example 2

Key

- 1 stem
- 2 cover
- 3 thrust washer
- 4 seat
- 5 body
- 6 ball
- 7 trunnion bearing
- 8 trunnion
- 9 gland
- 10 cover bolting
- 11 cover seal
- 12 stem seal
- 13 body seal
- 14 body cap
- 15 seat spring
- 16 body bolting
- 17 trunnion seal
- 18 trunnion plate
- 19 bearing spacer

Figure B.2 (*continued*)

Bibliography

- [1] ISO 4200, *Plain end steel tubes, welded and seamless — General tables of dimensions and masses per unit length*
- [2] ISO 5211, *Industrial valves — Part-turn actuator attachments*
- [3] ISO 6708, *Pipework components — Definition and selection of DN (nominal size)*
- [4] ISO 7268, *Pipe components — Definition of nominal pressure*
- [5] ISO 10434, *Bolted bonnet steel gate valves for the petroleum and natural gas industries*
- [6] ISO 14313, *Petroleum and natural gas industries — Pipeline transportation systems — Pipeline valves*
- [7] ISO 15761, *Steel gate, globe and check valves for sizes DN 100 and smaller, for the petroleum and natural gas industries*
- [8] ISO 17292, *Metal ball valves for petroleum, petrochemical and allied industries*
- [9] API Standard 608, *Metal ball valves — Flanged, threaded and welding end*
- [10] ASME B16.11, *Forged fittings, socket-welding and threaded*
- [11] ASME B16.20, *Metallic gaskets for pipe flanges — Ring joint, spiral wound and jacketed*
- [12] ASME B16.25, *Buttwelding ends*
- [13] ASME B36.10, *Welded and seamless wrought steel pipe*
- [14] ASTM A307, *Standard specification for carbon steel bolts and studs, 60 000 PSI tensile strength*
- [15] EN 1333, *Pipework components — Definition of PN*
- [16] EN 10269, *Steels and nickel alloys for fasteners with specified elevated and/or low temperature properties*

出售大量阀门技术图纸，工艺，计算，设计资料，代理非标阀门设计，标书制作QQ1263719818

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001. Fax: +44 (0)20 8996 7001. Email: orders@bsi-global.com. Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Technical Information Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre. Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: info@bsi-global.com.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001. Email: membership@bsi-global.com.

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager. Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553. Email: copyright@bsi-global.com.