

Electromagnetic compatibility (EMC) —

Part 6-3: Generic standards — Emission standard for residential, commercial and light-industrial environments

The European Standard EN 61000-6-3:2001, with the incorporation of amendment A11:2004 has the status of a British Standard

ICS 33.100.10

National foreword

This British Standard is the official English language version of EN 61000-6-3:2001, including amendment A11:2004 and Corrigendum December 2004. It was derived by CENELEC from IEC 61000-6-3:1996. It supersedes BS EN 50081-1:1992 which is now withdrawn.

The CENELEC common modifications have been implemented at the appropriate places in the text. The start and finish of each common modification is indicated in the text by tags **C** **C**. Where a common modification has been introduced by amendment, the tags carry the number of the amendment. For example, the common modifications introduced by CENELEC amendment A11 are indicated by **C11** **C11**.

The UK participation in its preparation was entrusted by Technical Committee GEL/210, EMC-Policy, to Subcommittee GEL/210/12, Basic and Generic standards, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this subcommittee can be obtained on request to its secretary.

Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the *BSI Catalogue* under the section entitled “International Standards Correspondence Index”, or by using the “Search” facility of the *BSI Electronic Catalogue* or of British Standards Online.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

This British Standard, having been prepared under the direction of the Electrotechnical Sector Policy and Strategy Committee, was published under the authority of the Standards Policy and Strategy Committee on 23 October 2001

Summary of pages

This document comprises a front cover, an inside front cover, the EN title page, pages 2 to 9 and a back cover.

The BSI copyright date displayed in this document indicates when the document was last issued.

Amendments issued since publication

Amd. No.	Date	Comments
15429	12 November 2004	See national foreword
15540 Corrigendum No. 1	1 March 2005	Addition to Foreword and addition of Annex ZZ

© BSI 1 March 2005

ISBN 0 580 38588 4

EUROPEAN STANDARD

EN 61000-6-3

NORME EUROPÉENNE

October 2001

EUROPÄISCHE NORM

+ A11

July 2004

ICS 33.100

Supersedes EN 50081-1:1992

English version

**Electromagnetic compatibility (EMC)
Part 6-3: Generic standards -
Emission standard for residential, commercial and
light-industrial environments**

(includes amendment A11:2004)
(IEC 61000-6-3:1996, modified)

Compatibilité électromagnétique (CEM)
Partie 6-3: Normes génériques -
Norme sur l'émission pour les
environnements résidentiels, commerciaux
et de l'industrie légère
(inclut l'amendement A11:2004)
(CEI 61000-6-3:1996, modifiée)

Elektromagnetische Verträglichkeit (EMV)
Teil 6-3: Fachgrundnormen - Fachgrundnorm
Störaussendung - Wohnbereich, Geschäfts-
und Gewerbebereiche sowie Kleinbetriebe
(enthält Änderung A11:2004)
(IEC 61000-6-3:1996, modifiziert)

This European Standard was approved by CENELEC on 2001-07-03 and amendment A11 was approved by CENELEC on 2004-07-01. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the Central Secretariat has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Central Secretariat: rue de Stassart 35, B - 1050 Brussels

© 2001 CENELEC - All rights of exploitation in any form and by any means reserved worldwide for CENELEC members.

Ref. No. EN 61000-6-3:2001 + A11:2004 E

Foreword

The text of the International Standard IEC 61000-6-3:1996, prepared by CISPR, International special committee on radio interference, together with the common modifications prepared by the Technical Committee CENELEC TC 210, Electromagnetic compatibility (EMC), was submitted to the formal vote and was approved by CENELEC as EN 61000-6-3 on 2001-07-03.

This European Standard supersedes EN 50081-1:1992.

The following dates were fixed:

- latest date by which the EN has to be implemented
at national level by publication of an identical
national standard or by endorsement (dop) 2002-04-01
- latest date by which the national standards conflicting
with the EN have to be withdrawn (dow) 2004-07-01

Annexes designated "normative" are part of the body of the standard.

In this standard, annex ZA is normative.

Annex ZA has been added by CENELEC.

Endorsement notice

The text of the International Standard IEC 61000-6-3:1996 was approved by CENELEC as a European Standard with agreed common modifications.

Foreword to amendment A11

This amendment to the European Standard EN 61000-6-3:2001 was prepared by the Technical Committee CENELEC TC 210, Electromagnetic compatibility (EMC).

The text of the draft was submitted to the Unique Acceptance Procedure and was approved by CENELEC as amendment A11 to EN 61000-6-3:2001 on 2004-07-01.

The following dates were fixed:

- latest date by which the amendment has to be implemented
at national level by publication of an identical
national standard or by endorsement (dop) 2005-07-01
- latest date by which the national standards conflicting
with the amendment have to be withdrawn (dow) 2007-07-01

This European Standard has been prepared under a mandate given to CENELEC by the European Commission and the European Free Trade Association and covers essential requirements of EC Directive(s). See Annex ZZ.

Annex ZZ has been added by CENELEC.

ELECTROMAGNETIC COMPATIBILITY (EMC) –

Part 6: Generic standards – Section 3: Emission standard for residential, commercial and light-industrial environments

1 Scope

This International Standard for emission requirements applies to electrical and electronic apparatus intended for use in the residential, commercial and light-industrial environment, as described in clause 5, for which no dedicated product or product-family emission standard exists. Apparatus designed to radiate electromagnetic energy for radio communication purposes is excluded from this standard.

Disturbances in the frequency range 0 Hz to 400 GHz are covered.

Where a relevant dedicated product or product-family EMC emission standard exists, this shall take precedence over all aspects of this generic standard.

The emission requirements have been selected so as to ensure that disturbances generated by apparatus operating normally at residential, commercial and light-industrial locations do not exceed a level which could prevent other apparatus from operating as intended. Fault conditions of apparatus are not taken into account.

Apparatus installed in the locations covered by this standard are considered to be directly connected to low-voltage public mains supplies or to a dedicated d.c. source which is intended to interface between the apparatus and the low-voltage public mains supply. Apparatus intended to be connected to an industrial power network or to special power supply sources are covered by another generic standard.

2 Normative references

NOTE

Normative references to international publications are listed in the annex ZA (normative)

3 Objective

The objective of this standard is to define limits and test methods for apparatus defined in the scope, in relation to electromagnetic emissions which may cause interference in other apparatus e.g. radio receivers.

These emission limits represent essential electromagnetic compatibility requirements.

Test requirements are specified for each port considered.

NOTES

- 1 The limits in this standard may not, however, provide full protection against interference to radio and television reception when the apparatus is used closer than 10 m to the receiving antenna(e).
- 2 In special cases, for instance when highly susceptible apparatus is being used in proximity, additional mitigation measures may have to be employed to reduce the electromagnetic emission further below the specified levels.

4 Definitions

Definitions related to EMC and to relevant phenomena may be found in the EEC Directive, in IEC 60050-161 and in IEC and CISPR publications. The definitions stated in the Directive (89/336/EEC) take precedence.

The following particular definitions are used in this standard:

port: Particular interface of the specified apparatus with the external electromagnetic environment (see figure 1).

enclosure port: The physical boundary of the apparatus through which electromagnetic fields may radiate or impinge.

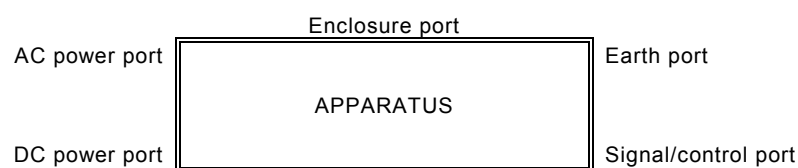


Figure 1 – Examples of ports

5 Description of locations

The environments encompassed by this standard are residential, commercial and light-industrial locations, both indoor and outdoor. The following list, although not comprehensive, gives an indication of locations which are included:

- residential properties, e.g. houses, apartments, etc.;
- retail outlets, e.g. shops, supermarkets, etc.;
- business premises, e.g. offices, banks, etc.;
- areas of public entertainment, e.g. cinemas, public bars, dance halls, etc.;
- outdoor locations, e.g. petrol stations, car parks, amusement and sports centre, etc.;
- light-industrial locations, e.g. workshops, laboratories, service centres, etc.

Locations which are characterized by being supplied directly at low voltage from the public mains are considered to be residential, commercial or light industrial.

6 Conditions during measurement

The measurements shall be made in the operating mode producing the largest emission in the frequency band being investigated consistent with normal applications.

An attempt shall be made to maximize the emission by varying the configuration of the test sample.

If the apparatus is part of a system, or can be connected to auxiliary apparatus, then the apparatus shall be tested while connected to the minimum configuration of auxiliary apparatus necessary to exercise the ports in accordance with CISPR 22.

The configuration and mode of operation during measurement shall be precisely noted in the test report.

If the apparatus has a large number of terminals, then a sufficient number shall be selected to simulate actual operating conditions and to ensure that all the different types of termination are covered.

The tests shall be carried out somewhere within the specified operating environmental range for the apparatus and at its rated supply voltage, unless otherwise indicated in the basic standard.

7 Documentation for the purchaser/user

7.1 Documentation which shall be supplied to the purchaser/user

The purchaser/user shall be informed if special measures have to be taken to achieve compliance, e.g. the use of shielded or special cables.

7.2 Documentation which shall be available to the purchaser/user upon request

A list of auxiliary apparatuses which, together with the apparatus, comply with the emission requirements shall be made available.

8 Applicability



Measurements are made on the relevant ports of the apparatus according to table 1. Measurements shall only be carried out where the relevant ports exists.

It may be determined from consideration of the electrical characteristics and usage of a particular apparatus that some of the measurements are inappropriate and therefore unnecessary. In such a case it is required that the decision not to measure be recorded in the test report.

9 Emission limits

The emission limits for apparatus covered by this standard are given on a port-by-port basis.

Measurements shall be performed in well-defined and reproducible conditions for each type of disturbance.

The description of the test, the test methods, and the test set-up are given in basic standards which are referred to in table 1.  

The contents of these basic standards are not repeated here; however, modifications or additional information needed for the practical application of the tests are given in this standard.



NOTE – The term “basic standard” has been used for want of a more suitable term. The standards referenced (CISPR , CISPR 22, IEC 61000-3-2 and IEC 61000-3-3) are stand-alone product-family standards.  The reference to “basic standards” is intended to be limited to those parts of the standard that give the description of the test, the test methods and the test set-up.

Table 1 – Emission

Port	Frequency range	Limits	Basic standard	Applicability note	Remarks
Enclosure	30 MHz – 230 MHz 230 MHz – 1000 MHz	30 dB(μV/m) at 10 m 37 dB(μV/m) at 10 m	CISPR 22, Class B	See note 1	The statistical evaluation in the basic standard applies
AC mains	0 kHz – 2 kHz		IEC 61000-3-2 IEC 61000-3-3	See note 2	The statistical evaluation in the basic standard applies
	0,15 MHz – 0,5 MHz limits decrease linearly with log. frequency	66 dB(μV) – 56 dB(μV) quasi-peak 56 dB(μV) – 46 dB(μV) average	CISPR 22, Class B		
	0,5 MHz – 5 MHz	56 dB(μV) quasi-peak 46 dB(μV) average			
	5 MHz – 30 MHz	60 dB(μV) quasi-peak 50 dB(μV) average			
	0,15 MHz – 30 MHz	See basic standard, clause: discontinuous interference	CISPR 14		
Signal, control, d.c. power input, d.c. power output and other	0,15 MHz – 0,5 MHz Limit decreasing linearly with log. frequency	40 dB(μA) – 30 dB(μA) quasi-peak 30 dB(μA) – 20 dB(μA) average	CISPR 22, Class B	Ⓔ See note 3 ⒸⒺ	Current probe measurement with line terminated to reference plane via 150 Ω
	0,5 MHz – 30 MHz	30 dB(μA) quasi-peak 20 dB(μA) average			
	NOTES				
1 Applicable only for apparatus containing processing devices, e.g. microprocessors, operating at frequencies greater than 9 kHz.					
2 Applicable to apparatus covered within the scope of IEC 61000-3-2 and IEC 61000-3-3. Ⓒ					
3 Ⓔ Applicable only to ports for which methods are defined in CISPR 22. ⒸⒺ					

Annex ZA

(normative)

**Normative references to international publications
with their corresponding European publications**

This European Standard incorporates by undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter.

When there is an undated reference to a generic, product or product-family standard which has been listed in the OJEC, then either the latest edition or (if the date of cessation of presumption of conformity associated with the latest edition has not expired) the superseded edition may be applied. After the date of cessation of presumption of conformity, the latest edition shall be applied.

When there is an undated reference to a basic standard, then either the latest edition or (if the date of withdrawal of conflicting standards associated with the latest edition has not expired) the superseded edition may be applied. After the date of withdrawal, the latest edition shall be applied.

<u>Publication</u>	<u>Title</u>	<u>EN/HD</u>
IEC 60050-161	International Electrotechnical Vocabulary (IEV) - Chapter 161: Electromagnetic compatibility	-
IEC 61000-3-2	Electromagnetic compatibility (EMC) Part 3-2: Limits - Limits for harmonic current emissions (equipment input current up to and including 16 A per phase)	EN 61000-3-2
IEC 61000-3-3	Electromagnetic compatibility (EMC) Part 3-3: Limits - Limitation of voltage fluctuations and flicker in low-voltage supply systems for equipment with rated current up to and including 16 A	EN 61000-3-3
CISPR 14-1	Electromagnetic compatibility - Requirements for household appliances, electric tools and similar apparatus – Part 1: Emission	EN 55014-1
CISPR 22	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement	EN 55022

Annex ZZ
(informative)

Coverage of Essential Requirements of EC Directives

This European Standard has been prepared under a mandate given to CENELEC by the European Commission and the European Free Trade Association and within its scope the standard covers only

– the essential requirements as given in Article 4 a) of the EC Directive 89/336/EC

and

– the corresponding essential requirements of article 3.1(b) of the EC Directive 1999/5/EC.

Compliance with this standard provides one means of conformity with the specified essential requirements of the Directive[s] concerned.

WARNING: Other requirements and other EU Directives may be applicable to the products falling within the scope of this standard.

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.
Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001.
Fax: +44 (0)20 8996 7001. Email: orders@bsi-global.com. Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.
Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: info@bsi-global.com.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.
Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001.
Email: membership@bsi-global.com.

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager.
Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553.
Email: copyright@bsi-global.com.

BSI
389 Chiswick High Road
London
W4 4AL